


Tripo Mini

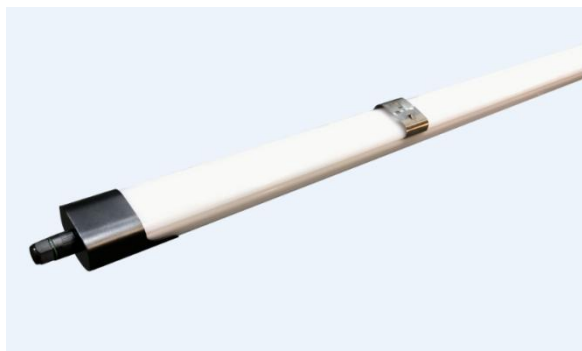

Features

- Up to 105 lm/watt
- Modern, stylish, excellent surface treatment
- Water proof, Dust proof, Corrosion proof
- Super-fast installation, suspended or surface mounted
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Light weight
- 5 Years Guarantee

Applications

- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting



LED Weather-proof Light Tripo Mini

LED Weather-proof Light Tripo Mini is Sheenly's new design for industrial lighting. It adopts auto human being detection for light on/off, light goes on when someone passes, light goes off to 10% brightness when no one. High wide detection range within 15 meters.

The whole structure well ensures IP65 waterproof and 5 years guarantee.

Specifications

Dimension

| | |
|-----|-------------------|
| 20W | 1150 x 50 x 35 mm |
| 25W | 1150 x 50 x 35 mm |
| 50W | 1450 x 50 x 35 mm |

Power & Lumen Output

| | |
|-----|-----------------|
| 20W | 2100 lm @ 4000K |
| 25W | 2600 lm @ 4000K |
| 50W | 5250 lm @ 4000K |

Color Temperature

| | |
|---------------|-------------|
| Warm White | 3000 ± 200K |
| Natural White | 4000 ± 250K |
| Pure White | 5700 ± 350K |

Color Rendering Index

>80

Rated Life (L80)

30,000 Hours

Housing

PC

Beam Spread

120°

Operating Temperature

-20°C to + 40°C (Amb.)

Input Voltage

EMEA version 220 - 240V/AC

Power Factor

>0.9

Working Voltage & Current

| | |
|-----|---------------------|
| 20W | 39 ± 2 V/DC & 440mA |
| 25W | 39 ± 2 V/DC & 550mA |
| 50W | 39 ± 2 V/DC & 550mA |

IP

IP65

IK

IK10

Installation

Suspension
Wall Mounting

Ordering Information

| Sheenly | Class | Watt | CCT | Model | Finishing | Options |
|---------------------|------------|-------------------|---|----------|-----------|---------|
| SL=Sheenly Lighting | TRL= Tripo | 20W 25W 50W | WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K | M4 M5 | | |

*XW: WW 3000K/NW 4000K/PW 5700K

| Part Number | Power | CCT | Lumen Output | Beam | Dimension |
|------------------|-------|-------|--------------|------|------------------|
| SL-TRL-20W-XW-M4 | 20W | 3000K | 2100 | 120° | 1150x 50 x 35mm |
| SL-TRL-25W-XW-M4 | 25W | 4000K | 2600 | 120° | 1150x 50 x 35mm |
| SL-TRL-50W-XW-M5 | 50W | 5700K | 5250 | 120° | 1450 x 50 x 35mm |



Packing Information

| Part Number | Pcs./Inner box | Master Carton Size[mm] | Pcs./Master Carton | Pcs./20' Container | Pcs./40' Container |
|------------------|----------------|------------------------|--------------------|--------------------|--------------------|
| SL-TRL-20W-XW-M4 | 2 | L1265*W285*H285 | 12 | 2016 | 4032 |
| SL-TRL-25W-XW-M4 | 2 | L1265*W285*H285 | 12 | 2016 | 4032 |
| SL-TRL-50W-XW-M5 | 2 | L1565*W285*H285 | 12 | 1512 | 3528 |

Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.