


## Tripo Linkable

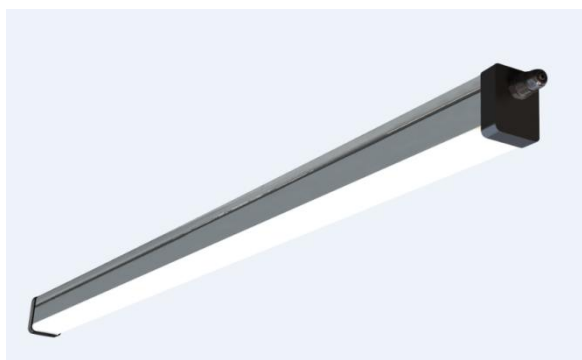

### Features

- Up to 110 lm/watt
- Modern, stylish, excellent surface treatment
- Water proof, Dust proof, Corrosion proof
- Super-fast installation, suspended or surface mounted
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Light weight
- Type of connection is linkable
- 5 Years Guarantee

### Applications

- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting



## LED Weather-proof Light Tripo Linkable

LED Weather-proof Light Tripo Linkable is Sheenly's new design for industrial lighting. It adopts auto human being detection for light on/off, light goes on when someone passes, light goes off to 10% brightness when no one. High wide detection range within 15 meters. The whole structure well ensures IP65 waterproof and 5 years guarantee.

### Specifications

#### Dimension

30W	1150 x 60 x 76 mm
40W	1150 x 60 x 76 mm
	1450 x 60 x 76 mm
50W	1450 x 60 x 76 mm

#### Power & Lumen Output

30W	3300 lm @ 4000K
40W	4400 lm @ 4000K
50W	5500 lm @ 4000K

#### Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

#### Color Rendering Index

>80

#### Rated Life (L80)

50,000 Hours

#### Housing

PC

#### Beam Spread

120°

#### Operating Temperature

-20°C to + 30°C (Amb.)

#### Input Voltage

EMEA version 100-277 /220-240 V/AC

#### Power Factor

>0.9

#### Working Voltage & Current

30W	36±3 V/DC & 700mA
40W	33±2 V/DC & 1050mA
50W	40±2 V/DC & 1050mA

#### Net Weight

1.35 – 1.65 Kg

#### IP

IP65


#### IK

IK10


#### Installation

Pendant Mounted  
Wall Mounted


## Dimension (mm)

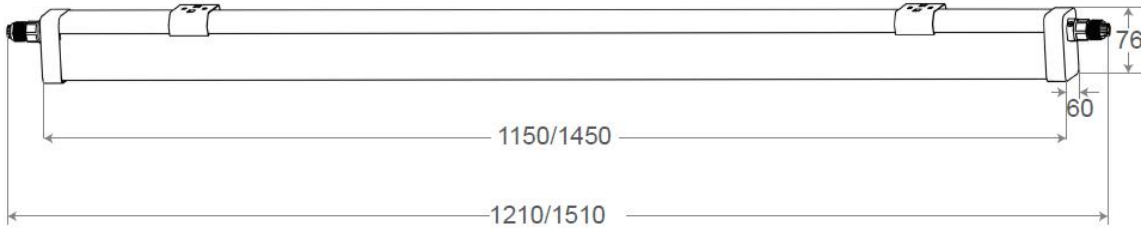

## Distribution Diagram

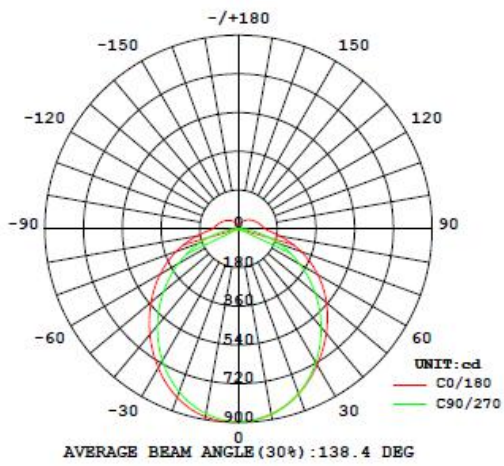

**30W 120°**

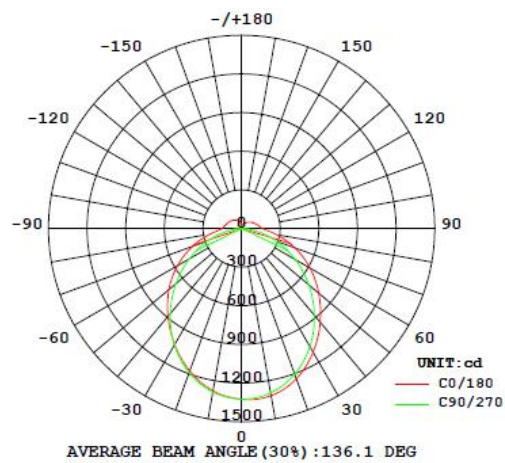

**40W 120°**


## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRL= Tripo	30W 40W 50W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	A4 A5		LK= Linkable

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-TRL-30W-XW-A4-LK	30W	3000K 4000K 5700K	3300	120°	1150x 60 x 76 mm
SL-TRL-40W-XW-A4-LK	40W		4400	120°	1150x 60 x 76 mm
SL-TRL-40W-XW-A5-LK	40W		4400	120°	1450x 60 x 76 mm
SL-TRL-50W-XW-A5-LK	50W		5500	120°	1450x 60 x 76 mm

\*XW: WW 3000K/NW 4000K/PW 5700K

## Accessory

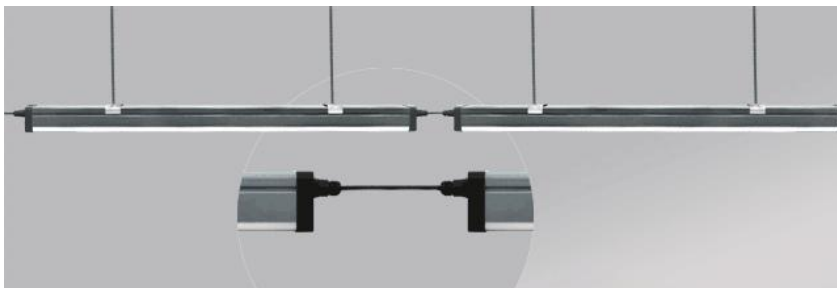

Accessories:  
Steel Cables, Screws, and accessories

## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-TRL-30W-XW-A4-LK	1	L1345*W210*H220	4	1440	2880
SL-TRL-40W-XW-A4-LK	1	L1345*W210*H220	4	1440	2880
SL-TRL-40W-XW-A5-LK	1	L1645*W210*H220	4		
SL-TRL-50W-XW-A5-LK	1	L1645*W210*H220	4		

### Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.