

Tripo



Features

- Up to 110 lm/watt
- Modern, stylish, excellent surface treatment
- Water proof, Dust proof, Corrosion proof
- Super-fast installation, suspended or surface mounted
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Light weight
- 5 Years Guarantee

Applications

- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting



REV 1.0
06/29/2017

LED Weather-proof Light Tripo

LED Weather-proof Light Tripo is Sheenly's new design for industrial lighting. It adopts auto human being detection for light on/off, light goes on when someone passes, light goes off to 10% brightness when no one. High wide detection range within 15 meters.

The whole structure well ensures IP65 waterproof and 5 years guarantee.

Specifications

Dimension

20W	550 x 76 x 60 mm
30W&40W	1150 x 76 x 60 mm
40W&50W	1450 x 76 x 60 mm

Power & Lumen Output

20W	2200 lm @ 5700K
30W	3300 lm @ 5700K
40W	4400 lm @ 5700K
50W	5500 lm @ 5700K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Daylight White	5000 ±300K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

PC

Beam Spread

110°

Operating Temperature

-20°C to +40°C (Amb.)

Input Voltage

EMEA version	200 - 240V/AC
NA version	100 - 277V/AC

Power Factor

>0.95

Working Voltage & Current

20W	36±3 V/DC & 450mA
30W	36±3 V/DC & 700mA
40W	33±2 V/DC & 1050mA
50W	40±2 V/DC & 1050mA

Net Weight

1.35 – 1.65 Kg

IP

IP65


IK

IK10


Installation

Suspension
Wall Mounting


Dimension (mm)

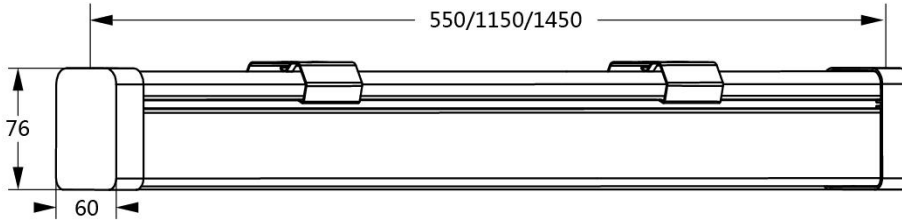

Distribution Diagram

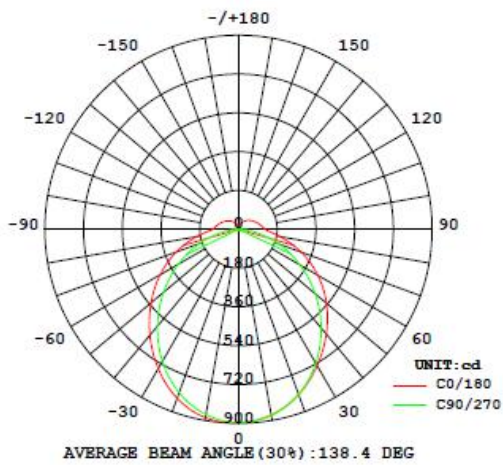

30W 120°

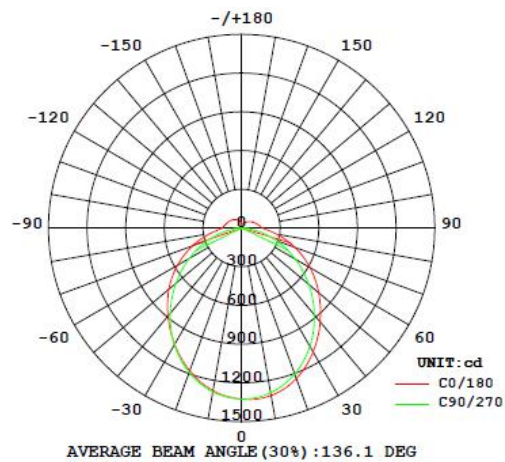

40W 120°

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRL=Tripo	20W	WW=3000 ±200K	U2		
		30W	NW=4000 ±250K	U4		
		40W	DW=5000 ±300K	U5		
		50W	PW=5700 ±350K			

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-TRL-20W-WW-U2	20W	3000K	2100	110°	550 x 76 x 60 mm
SL-TRL-20W-NW- U2	20W	4000K	2200	110°	550 x 76 x 60 mm
SL-TRL-20W-DW- U2	20W	5000K	2200	110°	550 x 76 x 60 mm
SL-TRL-20W-PW- U2	20W	5700K	2200	110°	550 x 76 x 60 mm
SL-TRL-30W-WW-U4	30W	3000K	3150	110°	1150 x 76 x 60 mm
SL-TRL-30W-NW- U4	30W	4000K	3300	110°	1150 x 76 x 60 mm
SL-TRL-30W-DW- U4	30W	5000K	3300	110°	1150 x 76 x 60 mm
SL-TRL-30W-PW- U4	30W	5700K	3300	110°	1150 x 76 x 60 mm
SL-TRL-40W-WW- U4	40W	3000K	4200	110°	1150 x 76 x 60 mm
SL-TRL-40W-NW- U4	40W	4000K	4400	110°	1150 x 76 x 60 mm
SL-TRL-40W-DW- U4	40W	5000K	4400	110°	1150 x 76 x 60 mm
SL-TRL-40W-PW- U4	40W	5700K	4400	110°	1150 x 76 x 60 mm
SL-TRL-40W-WW-U5	40W	3000K	4200	110°	1450 x 76 x 60 mm
SL-TRL-40W-NW- U5	40W	4000K	4400	110°	1450 x 76 x 60 mm
SL-TRL-40W-DW- U5	40W	5000K	4400	110°	1450 x 76 x 60 mm
SL-TRL-40W-PW- U5	40W	5700K	4400	110°	1450 x 76 x 60 mm
SL-TRL-50W-WW- U5	50W	3000K	5300	110°	1450 x 76 x 60 mm
SL-TRL-50W-NW- U5	50W	4000K	5500	110°	1450 x 76 x 60 mm
SL-TRL-50W-DW- U5	50W	5000K	5500	110°	1450 x 76 x 60 mm
SL-TRL-50W-PW- U5	50W	5700K	5500	110°	1450 x 76 x 60 mm

*XW: WW 3000K/NW 4000K /DW 5000K/PW 5700K

Accessory



Accessories:

Steel Cables, Screws, and accessories

Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2018 Sheenly Lighting all rights reserved.