

## R580



### Features

- Diameter 580mm
- Modern, stylish and Innovative design
- Uniform light output
- Up/Down Lighting Optional
- Transparent Optional
- White/Black/Silver finishing available
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Simple and convenient installation

### Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- Schools and Hospitals
- Hallway & lobbies
- Meeting Rooms



## Sheenly LED Round Panel Light



Sheenly LED Round Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly LED Panel light is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

### Specifications

<b>Dimension</b>	D580*15 mm
<b>Power &amp; Lumen Output</b>	
40W	3600 lm @ 4000K
60W	5400 lm @ 4000K
<b>Color Temperature</b>	
Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L70)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Optics</b>	Opal
<b>Beam Spread</b>	120°
<b>Operating Temperature</b>	-20°C to +45°C (Amb.)
<b>Input Voltage</b>	100-277/200-240V/AC
<b>Power Factor</b>	>0.95
<b>Working Voltage</b>	
40W	25 V/DC
60W	38 V/DC
<b>Working Current</b>	
	40W@1050mA
	60W@1400mA
<b>Net Weight</b>	3.15 Kg
<b>Glow Wire</b>	650 °C (850°C Optional)
<b>IP</b>	IP40
<b>IK</b>	IK05
<b>Installation</b>	Pendant Mounted Surface Mounted

## Dimension and Illumination Diagram

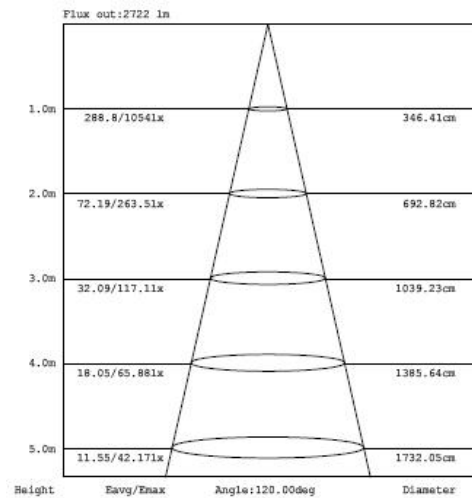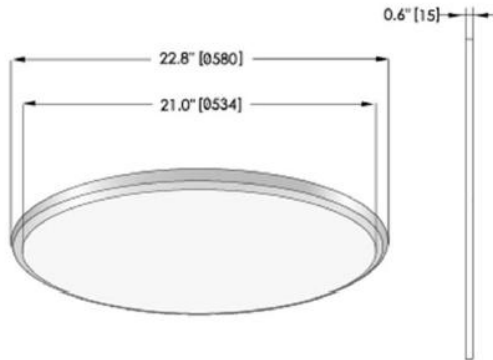

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	40W 60W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	R60	WH=White	

\*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-40W-WW-R60	40W	3000K/4000K/5700K	3600	120°	D580*15 mm
SL-PAN-40W-NW-R60			3600	120°	D580*15 mm
SL-PAN-40W-PW-R60			3600	120°	D580*15 mm
SL-PAN-60W-WW-R60	60W	3000K/4000K/5700K	5400	120°	D580*15 mm
SL-PAN-60W-NW-R60			5400	120°	D580*15 mm
SL-PAN-60W-PW-R60			5400	120°	D580*15 mm

## Accessory



Suspension Kit:  
Round Driver Box, Steel Cables, Screws, etc.  
Surface Mounted Kit:  
Round Driver Box, etc



## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-40W-XW-R60	1	L665*W220*H685	5	1200	2400
SL-PAN-60W-XW-R60	1	L665*W220*H685	5	1200	2400

### Shanghai Sheenly Lighting Co., Ltd.






No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2016 Sheenly Lighting all rights reserved.

## LED Round Panel Light R580 Surface Mounted

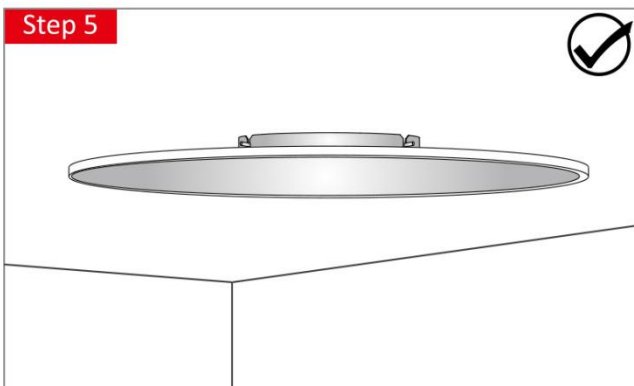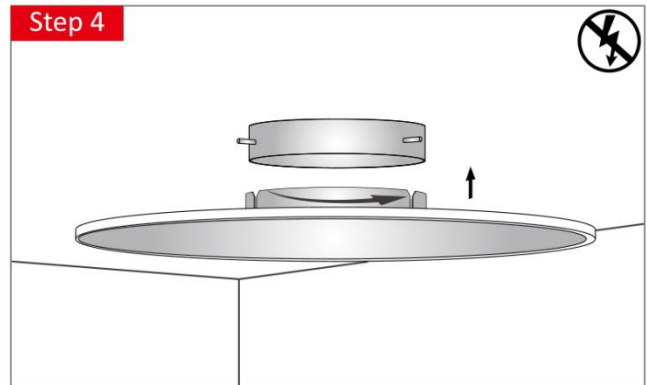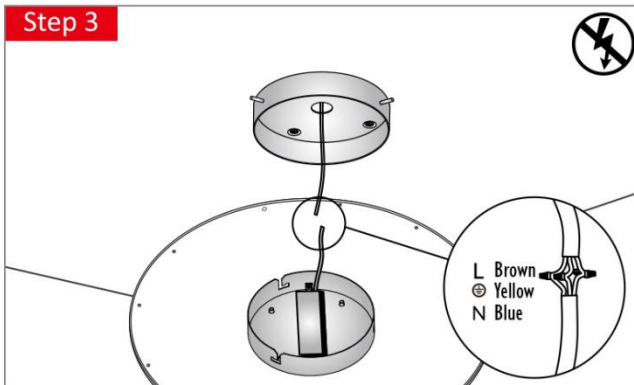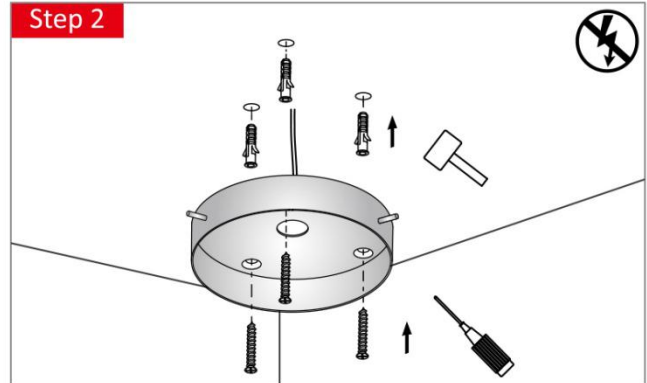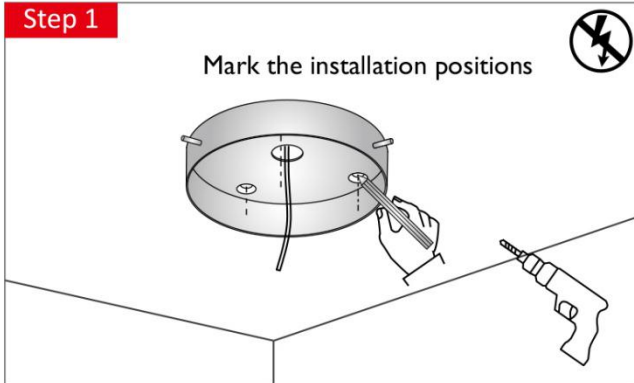

## LED Round Panel Light R580 - Column Surface Mounted

