


## 3 Step Tunable White Panel

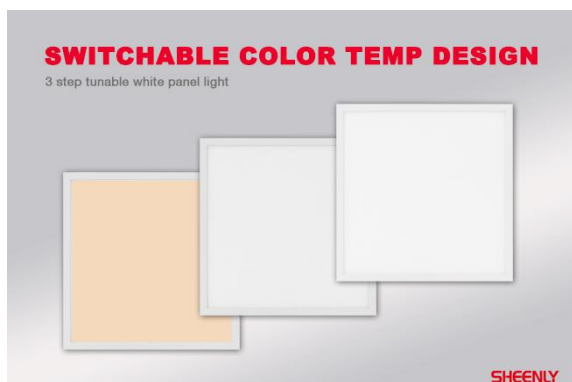

### Features

- Efficiency up to 100 lm/w, UGR<19 optional, SDCM<=4
- CRI >80, ErP compatible
- Ultra slim design 10mm thickness
- Different frame designs and colors are available
- Easy and various installation styles
- Dimmable compatible with Dali
- Lighting sensors and Motion sensors are optional
- Emergency battery pack last for 3 hours
- Customized size accepted
- 5 years guarantee for the panel

### Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Hallway & lobbies
- Meeting Rooms



REV 1.3

01/04/2018

## Sheenly LED Panel Light

Sheenly LED 3 Step Tunable White Panel has three fixed CCT 3000K+4000K+5700K, CCT can be switched by slide button on the cable. This kind of panel aims to help you release the stock pressure, it's very attractive and functional. Only need to stock one panel, you can have all the three color temperature panel.

### Specifications

#### Dimension (mm)

600*600 LED Panel	595 x595 x10
620*620 LED Panel	622 x622 x10

#### Power & Lumen Output

28W	2800 lm @ 4000K
35W	3500 lm @ 4000K

#### Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

#### Color Rendering Index

>80

#### Rated Life

50,000 Hours

#### Housing

Aluminum

#### Optics

Opal/Prismatic

#### UGR (4H/8H, 8H/4H)

<22/<19

#### Beam Spread

120°/100° UGR Optional

#### Operating Temperature

-20°C to +45°C (Amb.)

#### Input Voltage

220-240V/AC

#### Power Factor

>0.95

#### Flatness

<1.5mm

#### Working Voltage & Current

28W	35±2 V/DC & 750mA
35W	41±3 V/DC & 750mA

#### Net Weight (Includes Driver)

3.75 kg ~ 6.90 kg

#### Glow Wire

650 °C (850°C optional)

#### IP

IP40


#### IK

IK05

#### Installation

Pendent/ Surface mounted  
Clip in/Recessed

## Dimension [mm]

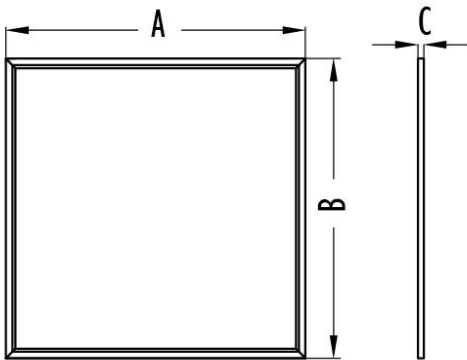

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
<b>600*600 LED Panel</b>	595±1	595±1	10±0.5
<b>620*620 LED Panel</b>	622±1	622±1	10±0.5

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	<b>28W</b> <b>35W</b>	<b>Tunable:</b> 3000K/4000K/5700K	<b>AN</b> <b>LS</b>	<b>WH=White</b> <b>SI=Silver</b>	

\*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-PAN-28W-TW-AN	28W	<b>Tunable:</b> 3000K/4000K/5700K	2800	120°	595 x595 x10
SL-PAN-35W-TW-AN	35W		3500		
SL-PAN-28W-TW-LS	28W		2800	120°	622 x622 x10
SL-PAN-35W-TW-LS	35W		3500		

TW: Tunable 3000K/4000K/5700K

## Accessory



Installation Fixtures,  
**SL-ACC-PEN-SQUARE**  
**SL-ACC-REC-CLIP**  
**SL-ACC-SUR-BOX**

### Shanghai Sheenly Lighting Co., Ltd.

Bldg22, No. 1688 Lianhang Road, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.