

## Tripo Pro



### Features

- Super-fast installation, suspended or surface mounted
- Easy & tool-less connect and maintenance, detachable end-cap
- Replaceable driver, upgradeable function(sensor, emergency, Dali)
- 7 Years Warranty on luminaire (driver limited to 5 years)
- Lifetime up to 65,000h (L70B50), (LIMITED\* DRIVER 50, 000h), L80B20 @50, 000h
- Up to 105 lm/watt
- Modern, stylish, excellent surface treatment
- Water proof, Dust proof, Corrosion proof
- Low operating temperature, makes it extremely versatile under different operating conditions

### Applications

- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting
- semi-outdoor Lighting



REV 1.1

10/25/2018

## LED Weather-proof Light Tripo Pro

LED Weather-proof Light Tripo Pro has an innovative end-cap design with built-in connector for fast and easy installation or connection. It's a high efficient and reliable LED Weather proof light that offer an excellent quality of light.

The whole structure well ensures IP65 waterproof and 7 years guarantee.

### Specifications

#### Dimension

40W	1150 x 70 x 75 mm
50W	1450 x 70 x 75 mm

#### Power & Lumen Output

40W	4200 lm @ 4000K
50W	5250 lm @ 4000K

#### Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

#### Color Rendering Index

>80

#### Rated Life (L70B50)

65,000h (driver limited to 50,000h)

#### Rated Life (L80B20)

50,000h

#### Housing

PC

#### Beam Spread

120°

#### Operating Temperature

-20°C to + 40°C (Amb.)

#### Input Voltage

EMEA version 100-277 /220-240 V/AC

#### Input wire

7-11mm

#### Circuit Breaker

40W	8 Pcs.
50W	8 Pcs.

#### Power Factor

>0.9

#### Working Voltage & Current

40W	33±2 V/DC & 1050mA
50W	40±2 V/DC & 1050mA

#### Net Weight

1.35 – 1.65 Kg

#### IP

IP65


#### IK

IK10

#### Installation


Pendant Mounted  
Surface Mounted

## Dimension (mm)

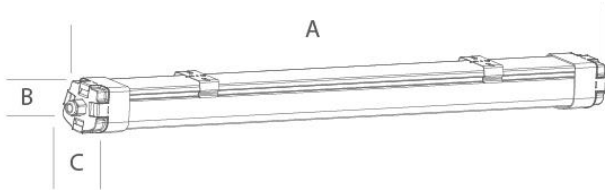

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
40W	[1150] 45.3"	[70] 2.7"	[75] 2.9"
50W	[1450] 57.1"	[70] 2.7"	[75] 2.9"

## Distribution Diagram

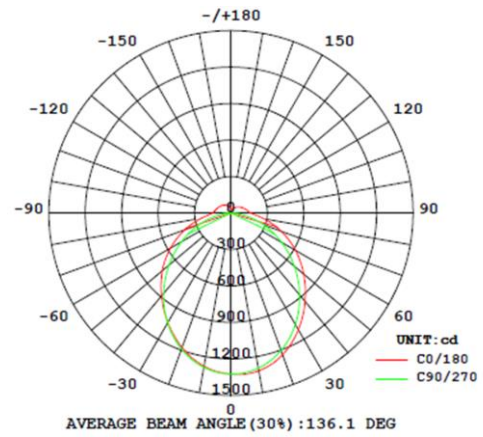

40W 120°


## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRL= Tripo	40W 50W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	A4 A5		LK= Linkable

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-TRL-40W-XW-A4-LK	40W	3000K	4200	120°	1150x 70 x 75 mm
SL-TRL-50W-XW-A5-LK	50W	4000K 5700K	5250	120°	1450x 70 x 75 mm

\*XW: WW 3000K/NW 4000K/PW 5700K

## Accessory

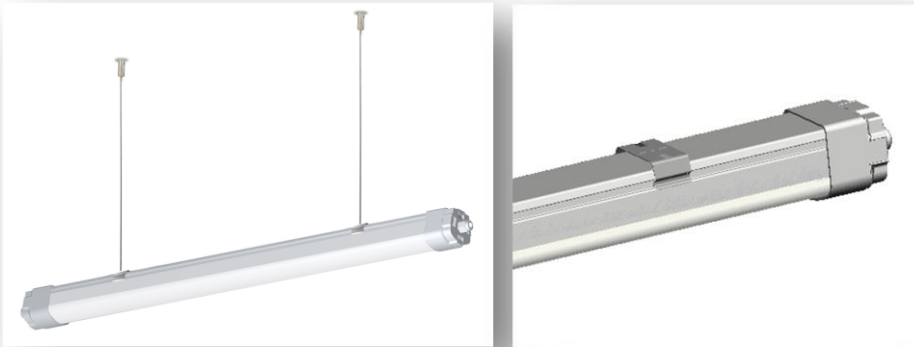

Accessories:  
Steel Cables, Screws, and accessories



## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-TRL-40W-XW-A4-LK	1	L1345*W210*H220	4	1440	2880
SL-TRL-50W-XW-A5-LK	1	L1645*W210*H220	4		

### Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

**\*All specifications subject to change without notice.**

**©2009-2018Sheenly Lighting all rights reserved.**