

AG Series

2.5"/4"/6"/8"



Features

- Anti-glare UGR<19
- Ideal CMH/CDM Replacement, 50% energy saving
- Cost-effective
- CRI90, good light quality
- 30,000 hours lifetime
- 2700K – 5700K wide CCT options for different applications demands
- Attractive surface treatment

Applications

- Shops
- Restaurants
- Hotels
- Lobbies
- Galleries
- Cabinets



REV 1.0

05/31/2018

Sheenly LED Downlight

Sheenly AG Series LED downlight as a high quality recessed downlight, positions itself at the high end of its category. They have very good glare restriction UGR<19.

Sheenly AG Series LED downlight with four different LED lumen package brings the benefits of low heat, low power consumption, high CRI. It adopts high color rendering index and appropriate beam angle make merchandise attractive and appealing.

Specifications

Dimension (mm)

2.5"	Ø95*48	CutOut:80
4"	Ø136*70	CutOut:120
6"	Ø189*94	CutOut:Ø170
8"	Ø 220*101	CutOut: Ø 200

Color Temperature

Std.Incandescent White	2700K-3000K
Warm White	3000K-3300K
Natural White	4000K-4300K
Pure White	5700K-6000K

Power & Lumen Output

2.5"	6W	600 lm @ 4000K
4"	18W	1800 lm @ 4000K
6"	28W	2800 lm @ 4000K
8"	38W	3800 lm @ 4000K

Color Rendering Index

>90

Rated Life (L70)

30,000 Hours

Housing

ADC12+PC

Beam Spread

100°

Operating Temperature

-20°C to +40°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.95

Net Weight

0.15 Kg – 0.75Kg

IP

IP20


IK

IK05

Installation

Clip in

Dimension (mm)

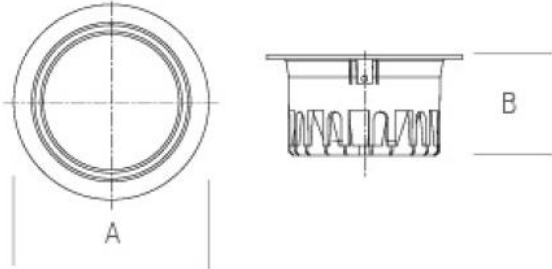


AG SERIES	Dimension A [mm]	Dimension B [mm]	Cutout [mm]
AG25	95	48	80
AG4	136	70	120
AG6	189	94	170
AG8	220	101	200

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	DOW=Down Light	8W	SW=2700K	AG25	White/Sliver	/
		18W	WW=3000K	AG4		
		28W	NW=4000K	AG6		
		38W	PW=5700K	AG8		

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-DOW-06W-XW-AG25	6W	2700K/3000K/4000K/5700K	600 lm	40°	Ø95*48 CutOut:80
SL-DOW-18W-XW-AG4	18W	2700K/3000K/4000K/5700K	1800 lm	40°	Ø136*70 CutOut:120
SL-DOW-28W-XW-AG6	28W	2700K/3000K/4000K/5700K	2800 lm	40°	Ø189*94 CutOut:Ø170
SL-DOW-38W-XW-AG8	38W	2700K/3000K/4000K/5700K	3800 lm	40°	Ø 220*101 CutOut: Ø 200

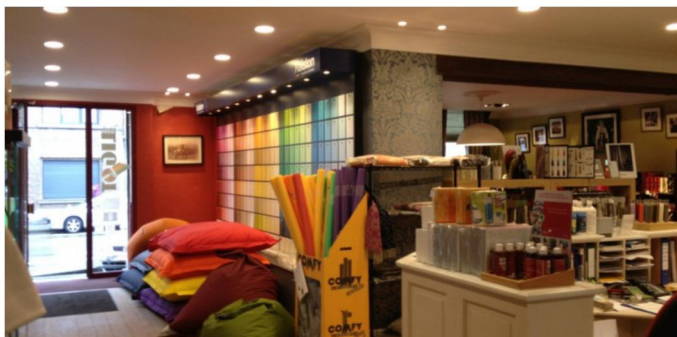

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-DOW-06W-XW-AG25	1	L480*W460*H295	48	13824	27648
SL-DOW-18W-XW-AG4	1	L520*W355*H405	24	7680	15360
SL-DOW-28W-XW-AG6	1	L700*W420*H510	24	3840	7680
SL-DOW-38W-XW-AG8	1	L505*W505*H560	16	1728	4032

Shanghai Sheenly Lighting Co., Ltd.

Bldg22, No. 1688 Lianhang Road, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2018 Sheenly Lighting all rights reserved.