

Panel Element version



Features

- Demand of good quality but low price market
- Efficiency up to 85 lm/w
- CRI >80, ErP compatible
- Ultra slim design <10mm thickness
- Different frame designs and colors are available
- Easy and various installation styles
- Lighting sensors and Motion sensors are optional
- 2 years guarantee for the panel

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Hallway & lobbies
- Meeting Rooms



REV 1.1
10/31/2017

Sheenly LED Panel Light

Sheenly Ultra Slim LED Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color.

Sheenly LED Panel light is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

Specifications

Dimension (mm)

600*600 LED Panel	595x595x8.8
620*620 LED Panel	622x622x8.8
300*1200 LED Panel	295x1195x8.8

Power & Lumen Output

40W	3400 lm @ 4000K
45W	3825 lm @ 4000K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Day White	5000 ±300K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

30,000 Hours

Housing

Aluminum

Optics

Opal/Prismatic

UGR

<22 (<19 optional)

Beam Spread

120°

Operating Temperature

-20°C to +40°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.9

Working Voltage & Current

40W	33±2 V/DC & 1050mA
45W	36±2 V/DC & 1050mA

Net Weight

3.75 kg ~ 8.9kg


IP

IP40

Installation

Pendent/ Clip in
Box Surface
mounted/Recessed

Dimension [mm]

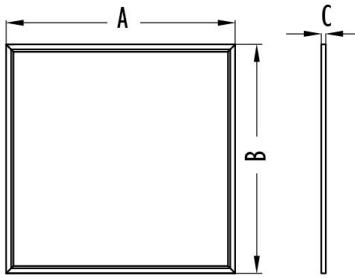

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
600*600 LED Panel	595 ±1	595 ±1	8.8 ±0.5
620*620 LED Panel	622 ±1	622 ±1	8.8 ±0.5
300*1200 LED Panel	295 ±1	1195 ±1	8.8 ±0.5

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	40W 45W	WW =3000 ±200K NW =4000 ±250K DW =5000 ±300K PW =5700 ±350K	EN EL ER	WH =White SI =Silver	

*Standard finishing comes in White, for other finishing color please specify when place the order.

	Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
600*600 LED Panel	SL-PAN-40W-WW-EN	40W	3000 ±200K	3200	120°	595 x 595 x 8.8
	SL-PAN-40W-NW-EN		3000 ±200K	3400		
	SL-PAN-40W-PW-EN		4000 ±250K	3400		
620*620 LED Panel	SL-PAN-40W-WW- EL	40W	3000 ±200K	3200	120°	622 x 622 x 8.8
	SL-PAN-40W-NW- EL		4000 ±250K	3400		
	SL-PAN-40W-PW- EL		6000 ±350K	3400		
300*1200 LED Panel	SL-PAN-45W-WW- ER	45W	3000 ±200K	3400	120°	300 x 1200 x 8.8
	SL-PAN-45W-NW- ER		4000 ±250K	3825		
	SL-PAN-45W-PW- ER		6000 ±350K	3825		

Accessory



Installation Fixtures,

SL-ACC-PEN-SQUARE

SL-ACC-SUR-BOX

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-40W-xW-EN	2	L685*W220*H745	6	1152	2304
SL-PAN-40W-xW-EL	2	L685*W220*H745	6	1152	2304
SL-PAN-45W-xW-ER	2	L1390*W220*H390	6	1200	2400

Shanghai Sheenly Lighting Co., Ltd.

No. 1688, Lianhang Road, Minhang District Shanghai 201112, China








Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2016 Sheenly Lighting all rights reserved.

LED Panel Light - Suspension Rope

☑ Flat Frame Panels

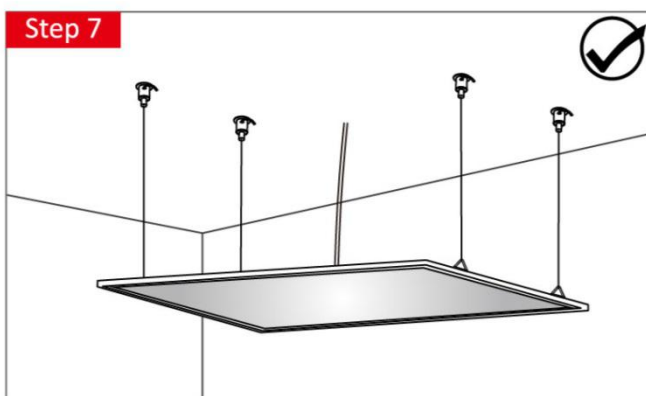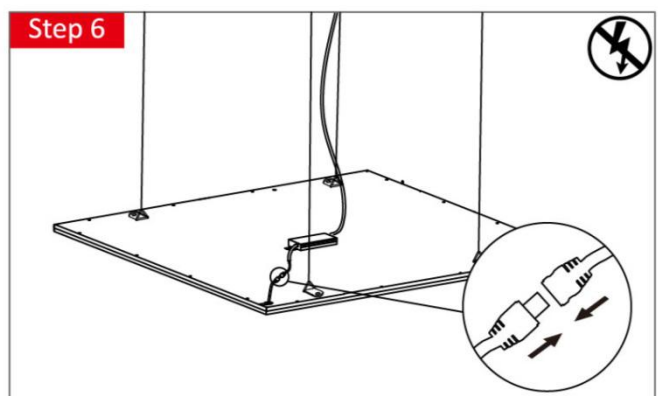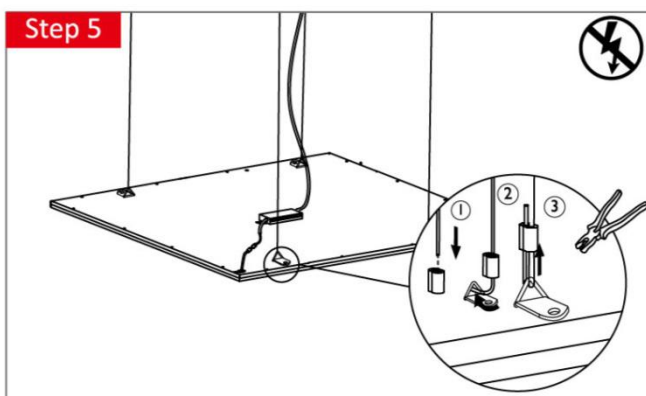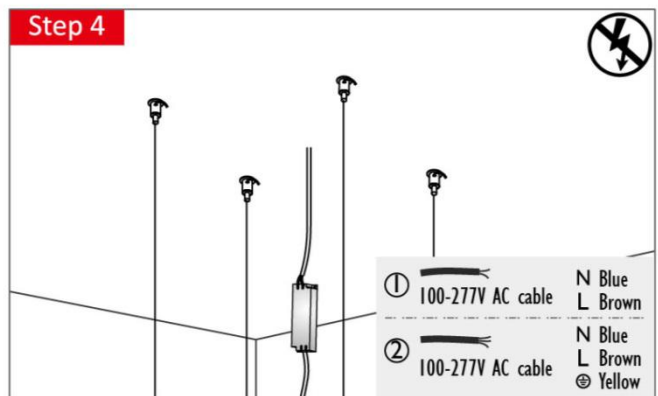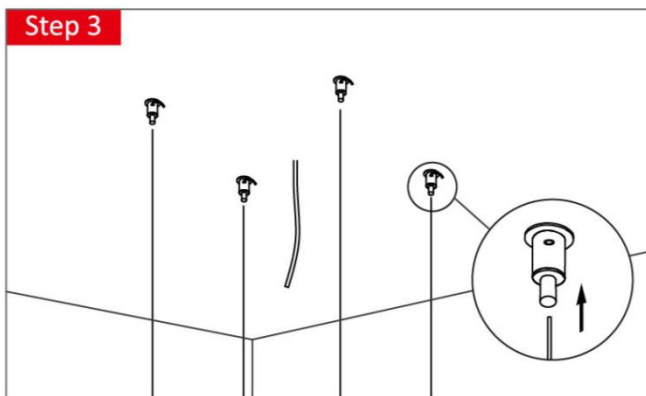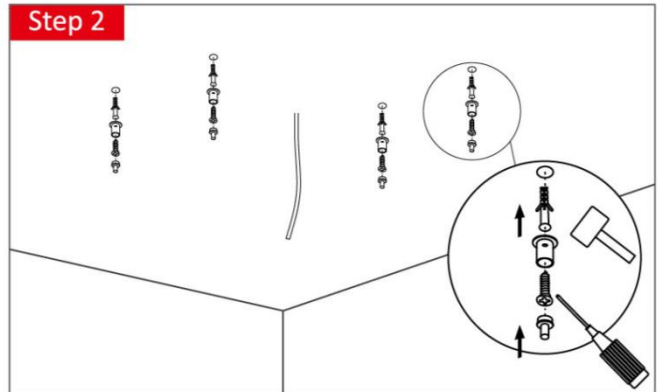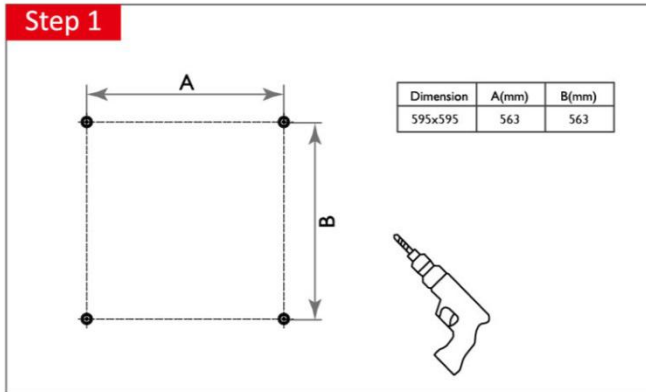

LED Panel Light - Box Surface Mounted

☑ 595x595mm Flat Frame Panel

Step 1

Dimension	A(mm)
622×622	482
595×595	451

Step 2

Slide the 2 corners without adhesive tape into the frame

Step 3

Step 4

Step 5

Step 6

Tear the surface films of adhesive tape in the other 2 corners

Step 7

**Lighting Up
a New World**