

Sheenly LED Panel Light

Element



Features

- 2 Sides edge-lit
- Efficiency up to 100 lm/w
- CRI >80, ErP compatible
- Ultra slim design 10mm thickness
- Easy and various installation styles
- Lighting sensors and Motion sensors are optional
- 5 years warranty with PMMA LGP
2 years warranty with PS LGP

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Hallway & lobbies
- Meeting Rooms

Specifications

Dimension (mm)

600*600 LED Panel	595 x595 x10
300*1200 LED Panel	295 x1195 x10

Power & Lumen Output

35W	3500 lm @ 4000K
-----	-----------------

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80) with PS LGP

30,000hours

Rated Life (L80) with PMMA LGP

50,000 Hours

Housing

Aluminum

Beam Spread

120°

Operating Temperature

-20°C to +40°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.9

Net Weight

1.25 kg

IP

IP40

Installation


Recessed
Box Surface mounted



REV 1.1

08/29/2019

Dimension [mm]

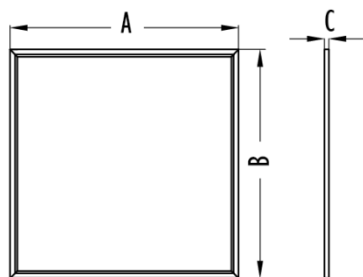

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
600*600 LED Panel	595 ±1	595 ±1	10 ±0.5
300*1200 LED Panel	295 ±1	1195 ±1	10 ±0.5

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	35W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	AEN AER UEN UER	WH=White	

*Standard finishing comes in White.

	Part Number	Power	CCT	Lumen Output	LGP	Beam	Dimension [mm]
600*600 LED Panel	SL-PAN-35W-WW-AEN	35W	3000 ±200K	3200 lm	PS	120°	595 x 595 x 10
	SL-PAN-35W-NW-AEN		4000 ±250K	3500 lm			
	SL-PAN-35W-PW-AEN		5700 ±350K	3500 lm			
	SL-PAN-35W-WW-UEN	35W	3000 ±200K	3200 lm	PMMA	120°	
	SL-PAN-35W-NW-UEN		4000 ±250K	3500 lm			
	SL-PAN-35W-PW-UEN		5700 ±350K	3500 lm			
300*1200 LED Panel	SL-PAN-35W-WW-AER	35W	3000 ±200K	3200 lm	PS	120°	295 x 1195 x 10
	SL-PAN-35W-NW-AER		4000 ±250K	3500 lm			
	SL-PAN-35W-PW-AER		5700 ±350K	3500 lm			
	SL-PAN-35W-WW-UER	35W	3000 ±200K	3200 lm	PMMA	120°	
	SL-PAN-35W-NW-UER		4000 ±250K	3500 lm			
	SL-PAN-35W-PW-UER		5700 ±350K	3500 lm			

Accessory



Installation Fixtures,
SL-ACC-SUR-BOX

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-35W-XW-AEN	2	L620*W170*H690	10	2560	5120
SL-PAN-35W-XW-UEN	2	L620*W170*H690	10	2560	5120
SL-PAN-35W-XW- AER	2	L1300*W170*H330	10	2880	5760
SL-PAN-35W-XW- UER	2	L1300*W170*H330	10	2880	5760

Shanghai Sheenly Lighting Co., Ltd.

Bldg22, No. 1688 Lianhang Road, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2019 Sheenly Lighting all rights reserved.