

Recessed Linear Light



Features

- High lighting efficiency, up to 105lm/W
- Ultra-thin & Recessed design
- UGR<19 optional, ideal light distribution for Office Lighting
- Simple and fast recessed installation.
- Easy connectable.
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee

Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Warehouses
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms



LED Recessed Linear Light

Sheenly LED Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly's new LED Recessed Linear Light brings out the beauty of any space with a unifying aesthetic.

Specifications

Dimension ([mm])

26W	1150*57*32
35W	1450*57*32

Power & Lumen Output

26W	2800 lm @ 4000K
35W	3600 lm @ 4000K

Color Temperature

Warm White	3000 ± 200K
Natural White	4000 ± 250K
Pure White	5700 ± 350K

Color Rendering Index

>80

Rated Life (L70)

50,000 Hours

Housing

Aluminum

Beam Spread

120°

Operating Temperature

-20°C to +60°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.9

Working Voltage & Current

26W 30±2 V/DC & 700mA

35W 41±2 V/DC & 700mA

Glow Wire

650 °C (850°C Optional)

IP

IP40


IK

IK05

Installation

Clip in

Dimension

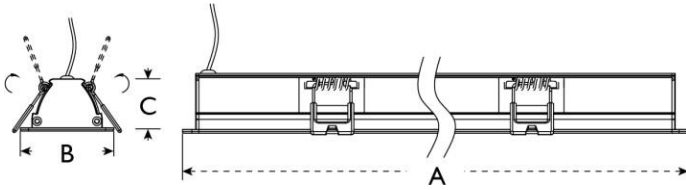

	Dimension A	Dimension B	Dimension C
	[mm]	[mm]	[mm]
26W	1150	57	32
35W	1450	57	32

Ordering Information

Sheenly	Class	Watt	CCT	Model
SL=Sheenly Lighting	XLN=Linear Light	26W 35W	WW =3000 ±200K NW =4000 ±250K PW =5000 ±350K	R4 R5

Part Number	Power	CCT	Lumen Output	Beam	Dimension (mm)	Cutout
						(mm)
SL- XLN -26W- WW- R4	26W	3000K ±200K	2600	120°	1150*57*32	1140*46
SL- XLN -26W- NW- R4		4000K ±250K	2800	120°		
SL- XLN -26W- DW- R4		5000K ±300K	2800	120°		
SL- XLN -35W- WW- R5	35W	3000K ±200K	3400	120°	1450*57*32	1440*46
SL- XLN -35W- NW- R5		4000K ±250K	3600	120°		
SL- XLN -35W- DW- R5		5000K ±300K	3600	120°		



Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-LIN-26W-XW-R4	1	L1235*W195*H270	8	2240	4480
SL-LIN-35W-XW-R5	1	L1535*W195*H270	8	1344	3136

Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai
201112, China
Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

***All specifications subject to change without notice.
©2009-2018 Sheenly Lighting all rights reserved.**