


Grinna

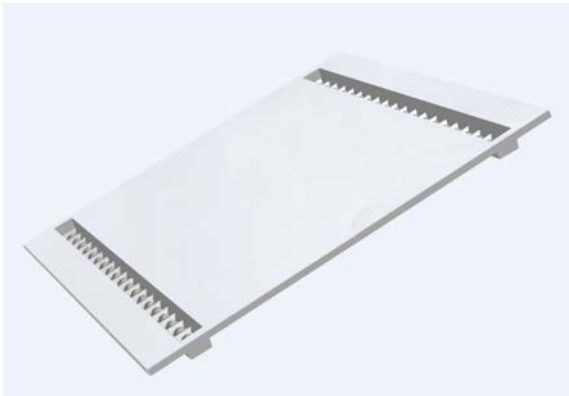

Features

- Stylish design, unusual ceiling
- Efficiency up to 120 lm/w
- Anti-glare, UGR<19
- SDCM<=4
- CRI >80, ErP compatible
- Ultra slim design 25mm thickness
- Easy and various installation
- 5 years guarantee

Applications

Meets the general and decoration lighting environment such as:

- Office
- Technical drawing workplace
- Precision work lab
- Restaurant
- School and Hospital
- Hallway & lobby
- Meeting Room



REV 1.0
10/27/2017

Sheenly LED Troffer Light Grinna

Sheenly innovative Back-lite Troffer light-Grinna show a stylish design in your ceiling. Troffer light-Grinna with built-in driver adopts integrated design, and integral firm structure.

Sheenly Troffer Light-Grinna used qualified super bright LED as light source, which is stable, long life and no UV & IR emission. Moreover, it creates extremely harmonious and uniform lights, which conventional light never achieved.

Specifications

Dimension (mm)

EGR	595 x 595 x 30
GGR	622 x 622 x 30

Power & Lumen Output

30W	3500 lm @ 4000K
-----	-----------------

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

Aluminum

Optics

Opal

Beam Spread

90°

Operating Temperature

-20°C to +45°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.95

Flatness

<1.5mm

Net Weight (Includes Driver)

2.12 kg

Glow Wire

650 °C (850°C optional)

IP

IP54(Room Side)

IK

IK05


Installation

Recessed

Pendent Mounted

Box Surface Mounted

Dimension

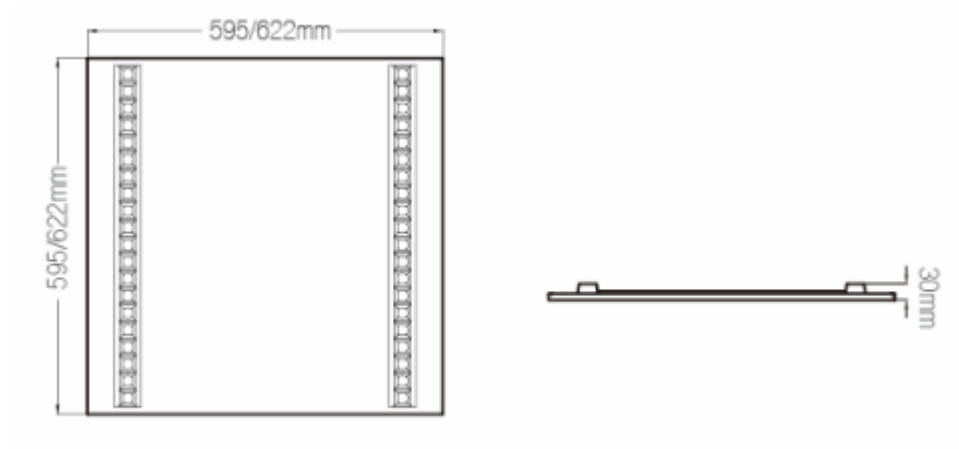

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
EGR	595±1	595±1	30±1
GGR	622±1	622±1	30±1

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRO=Troffer	30W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	EGR GGR	WH=White SI=Silver	

*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-TRO-30W-WW-EGR	30W	3000±200K	3300	90°	595 x595 x30
SL-TRO-30W-NW- EGR	30W	4000±250K	3500	90°	595 x595 x30
SL-TRO-30W-PW- EGR	30W	5700±350K	3600	90°	595 x595 x30
SL-TRO-30W-WW-GGR	30W	3000±200K	3300	90°	622 x622 x30
SL-TRO-30W-NW-GGR	30W	4000±250K	3500	90°	622 x622 x30
SL-TRO-30W-PW-GGR	30W	5700±350K	3600	90°	622 x622 x30

Shanghai Sheenly Lighting Co., Ltd.

No.1688 Lianhang Road, Bldg 22, Minhang District, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.