

LED Troffer Light Vatro



Features

- Stylish design, unusual ceiling
- Efficiency up to 125 lm/w
- Anti-glare, UGR<19
- SDCM<=4
- CRI >80, ErP compatible
- Ultra slim design 25mm thickness
- Easy and various installation
- 5 years guarantee

Applications

Meets the general and decoration lighting environment such as:

- Office
- Technical drawing workplace
- Precision work lab
- Restaurant
- School and Hospital
- Hallway & lobby
- Meeting Room

Sheenly LED Troffer Light

Sheenly innovative Back-lite Troffer light-Vatro show a stylish design in your ceiling. Troffer light-Vatro with built-in driver adopts integrated design, and integral firm structure.

Sheenly Troffer Light-Vatro used qualified super bright LED as light source, which is stable, long life and no UV & IR emission. Moreover, it creates extremely harmonious and uniform lights, which conventional light never achieved.

Specifications

Dimension (mm)

EX	595 x 595 x 25
GX	622 x 622 x 25

Power & Lumen Output

28W	3500 lm @ 4000K
40W	5000 lm @ 4000K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

Aluminum

Optics

Opal

Beam Spread

90°

Operating Temperature

-20°C to +45°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.95

Flatness

<1.5mm

Working Voltage & Current

28W	39±3V/DC & 700mA
40W	33±3 V/DC & 1150mA

Net Weight (Includes Driver)

2.12 kg

Glow Wire

650 °C (850°C optional)

IP

IP54(Room Side)

IK


IK05

Installation

Recessed/Box Surface Mounted/Pendant



Dimension [mm]

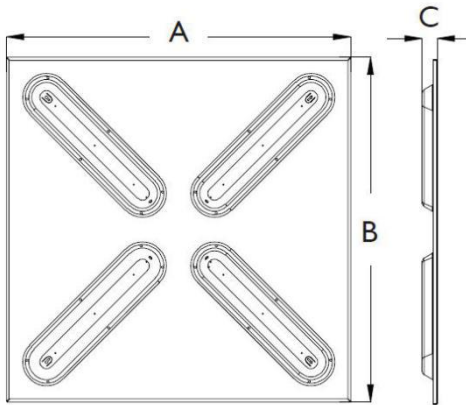

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
EX	595±1	595±1	25±1
GX	622±1	622±1	25±1

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRO=Troffer	28W 40W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	EX GX	WH=White SI=Silver	

*Standard finishing comes in White, for other finishing color please specify when place the order.

	Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
595*595 LED Panel	SL-TRO-28W-WW-EX	28W	3000±200K	3300	80°	595 x595 x25
	SL-TRO-28W-NW-EX	28W	4000±250K	3500	80°	595 x595 x25
	SL-TRO-28W-PW-EX	28W	5700±350K	3500	80°	595 x595 x25
622*622 LED Panel	SL-TRO-28W-WW-GX	28W	3000±200K	3300	80°	622 x622 x25
	SL-TRO-28W-NW-GX	28W	4000±250K	3500	80°	622 x622 x25
	SL-TRO-28W-PW-GX	28W	5700±350K	3500	80°	622 x622 x25
595*595 LED Panel	SL-TRO-40W-WW-EX	40W	3000±200K	4800	80°	595 x595 x25
	SL-TRO-40W-NW-EX	40W	4000±250K	5000	80°	595 x595 x25
	SL-TRO-40W-PW-EX	40W	5700±350K	5000	80°	595 x595 x25
622*622 LED Panel	SL-TRO-40W-WW-GX	40W	3000±200K	4800	80°	622 x622 x25
	SL-TRO-40W-NW-GX	40W	4000±250K	5000	80°	622 x622 x25
	SL-TRO-40W-PW-GX	40W	5700±350K	5000	80°	622 x622 x25

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-TRO-28W-XW-EX	1	L675*W340*H675	4	576	1152
SL-TRO-28W-XW-GX	1	L675*W340*H675	5	576	1152
SL-TRO-40W-XW-EX	1	L675*W340*H675	4	576	1152
SL-TRO-40W-XW-GX	1	L675*W340*H675	5	576	1152

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China
Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.
©2009-2017 Sheenly Lighting all rights reserved.