


Tripo Linkable

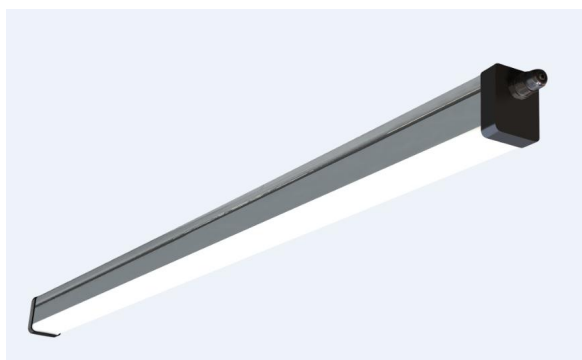

Features

- Up to 110 lm/watt
- Modern, stylish, excellent surface treatment
- Water proof, Dust proof, Corrosion proof
- Super-fast installation, suspended or surface mounted
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Light weight
- Type of connection is linkable
- 5 Years Guarantee

Applications

- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting



LED Weather-proof Light Tripo Linkable

LED Weather-proof Light Tripo Linkable is Sheenly' s new design for industrial lighting. It adopts auto human being detection for light on/off, light goes on when someone passes, light goes off to 10% brightness when no one. High wide detection range within 15 meters.

The whole structure well ensures IP65 waterproof and 5 years guarantee.

Specifications

Dimension

30W	1150 x 60 x 76 mm
40W	1150 x 60 x 76 mm
	1450 x 60 x 76 mm
50W	1450 x 60 x 76 mm

Power & Lumen Output

30W	3300 lm @ 4000K
40W	4400 lm @ 4000K
50W	5500 lm @ 4000K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

PC

Beam Spread

120°

Operating Temperature

-20° C to + 30° C (Amb.)

Input Voltage

EMEA version 100-277 /220-240 V/AC

Power Factor

>0.9

Working Voltage & Current

30W	36±3 V/DC & 700mA
40W	33±2 V/DC & 1050mA
50W	40±2 V/DC & 1050mA

Net Weight

1.35 - 1.65 Kg

IP

IP65

IK


IK10

Pendant Mounted


Installation

Wall Mounted


Dimension (mm)

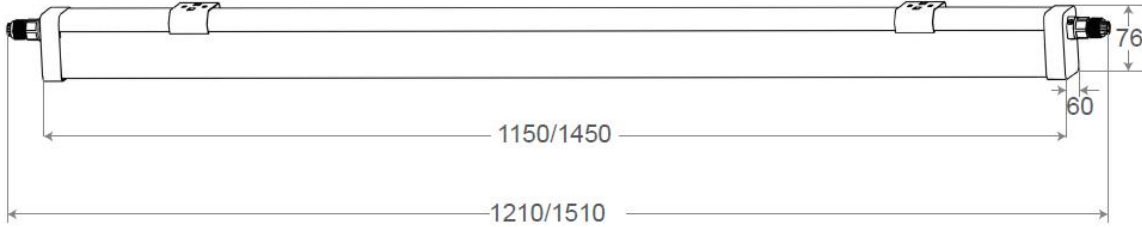

Distribution Diagram

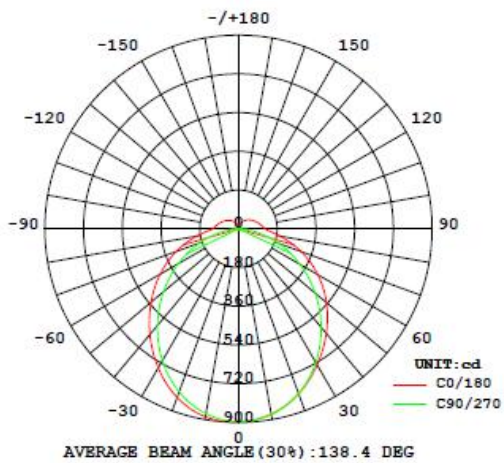

30W 120°

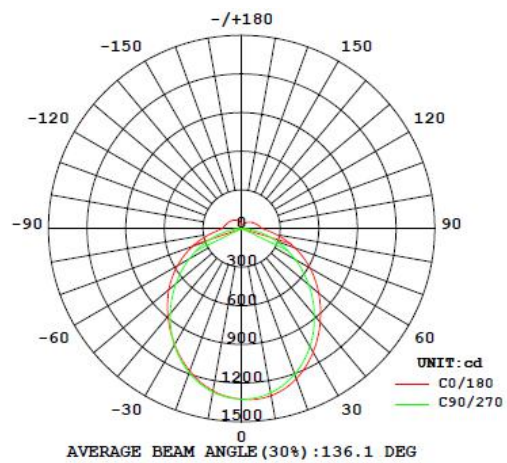

40W 120°


Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRL= Tripo	30W	WW=3000 ±200K	A4		LK= Linkable
		40W	NW=4000 ±250K	A5		
		50W	PW=5700 ±350K			

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-TRL-30W-XW-A4-LK	30W	3000K 4000K 5700K	3300	120°	1150x 60 x 76 mm
SL-TRL-40W-XW-A4-LK	40W		4400	120°	1150x 60 x 76 mm
SL-TRL-40W-XW-A5-LK	40W		4400	120°	1450x 60 x 76 mm
SL-TRL-50W-XW-A5-LK	50W		5500	120°	1450x 60 x 76 mm

*XW: WW 3000K/NW 4000K/PW 5700K

Accessory

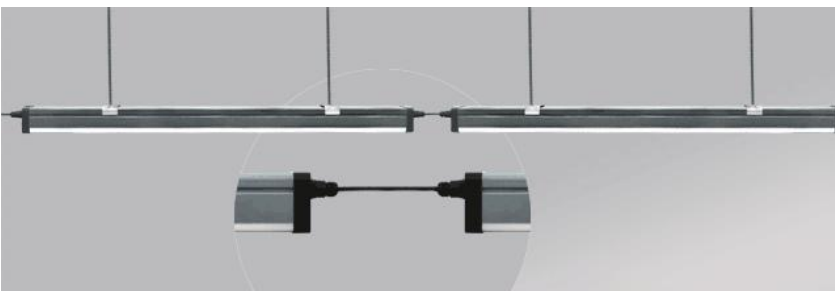

Accessories:
Steel Cables, Screws, and accessories

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.