

Modo UGR25



- Up to 120 lm/watt, UGR<25
- Unique grille design, innovative heat sink
- Modularization, easy to assemble.
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Adjustable beam angle 135° - 45°
- Versatile and easy installation, suspension, and wall mounted
- 5 Years Guarantee

Applications

- Factory
- Warehouse
- Exhibition Hall
- Parking Lot
- Indoor Industrial Lighting



Sheenly LED Linear Highbay Light

LED Linear Highbay as a new generation of LED Highbay Light is complement and reinforce of the LED Bay Light industrial lighting.

The innovative grille design benefits air convection and heat sink. The professional adjustable combined bracket makes it easy to change the beam angle of lights and suitable for widely applications.

The whole structure well ensures IP54 waterproof and 5 years guarantee.

Specifications

Dimension

100W	645*125*56.5 mm
150W	845*125*56.5 mm
200W	1245*125*56.5 mm
200W (Double combination)	740*375*56.5 mm
300W (Double combination)	940*375*56.5 mm
400W (Double combination)	1340*375*56.5 mm

Power & Lumen Output

100W	12000 lm @ 4000K
150W	18000 lm @ 4000K
200W	24000 lm @ 4000K
300W	36000 lm @ 4000K
400w	48000 lm @ 4000K

Color Temperature

Warm White	3000 ±250K
Natural White	4000 ±300K
Daylight White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

Aluminum

Beam Spread

75°

Operating Temperature

-20°C to +45°C (Amb.)

Input Voltage

100-305V/AC

Power Factor

>0.95

Net Weight

6.10 - 7.35 Kg

IP

IP54

IK


IK10

Installation

Pendent

Wall Mounting

Dimension(mm)

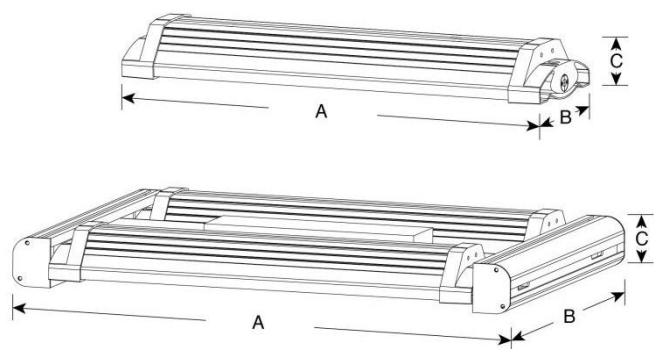

	Dimension A	Dimension B	Dimension C
100W	645 mm	125 mm	56.5 mm
150W	845 mm	125 mm	56.5 mm
200W	1245 mm	125 mm	56.5 mm
200W (Double combination)	740 mm	375 mm	56.5 mm
300W	940 mm	375 mm	56.5 mm
400W	1340 mm	375 mm	56.5 mm

Ordering Information

Sheenly	Class	Watt	CCT	Model	Options
SL=Sheenly Lighting	BAY=Bay Light	100W 150W 200W 300W 400W	WW=3000±250K NW=4000 ±300K PW=5700 ±350K	EM	UGR=UGR<25

*Standard finishing comes in Sliver, for other finishing color please specify when place the order.

Part Number	Power (W)	CCT	Lumen Output (lm)	Beam	Dimension (mm)
SL-BAY-100W-XW-EM1-UGR	100W	3000K/4000K/5700K	12000	75°	645*125*56.5
SL-BAY-100W-XW-EM2-UGR	200W	3000K/4000K/5700K	24000	75° Adjustable+/-45°	740*375*56.5
SL-BAY-150W-XW-EM1-UGR	150W	3000K/4000K/5700K	18000	75°	845*125*56.5
SL-BAY-150W-XW-EM2-UGR	300W	3000K/4000K/5700K	36000	75° Adjustable+/-45°	940*375*56.5
SL-BAY-200W-XW-EM1-UGR	200W	3000K/4000K/5700K	24000	75°	1245*125*56.5
SL-BAY-200W-XW-EM2-UGR	400W	3000K/4000K/5700K	48000	75° Adjustable+/-45°	1340*375*56.5

*XW: WW 3000K /NW 4000K /PW 5700K

*All the default lumen data is based on 4000K, for WW 3000K lumen will be around 10% lower.

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-BAY-100W-XW-EM1-UGR	1	L735*W375*H380	4	640	1280
SL-BAY-100W-XW-EM2-UGR	1	L735*W375*H380	4	640	1280
SL-BAY-150W-XW-EM1-UGR	1	L935*W375*H380	4	640	1280
SL-BAY-150W-XW-EM2-UGR	1	L935*W375*H380	4	640	1280
SL-BAY-200W-XW-EM1-UGR	0	L825*W430*H120	1	360	720
SL-BAY-200W-XW-EM2-UGR	0	L825*W430*H120	1	360	720

Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

***All specifications subject to change without notice.**

©2009-2018 Sheenly Lighting all rights reserved.
