

## LED Flat Down Light R25/R4/R6/R8/R30



### Features

- The highest PFC driver can be up to 0.99
- CRI>80, Erp compatible
- Ultra slim design
- Suitable for recessed installation
- Dimmable compatible with Dali
- Lighting sensors and Motion sensors are optional
- 5 years guarantee

### Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Workshop
- Meeting Rooms



REV 1.0  
05/21/2018

## Sheenly LED Flat Downlight

Sheenly LED Flat Downlight adopt super bright LED as its luminous body, powered by low voltage constant current driver.

Excellent thermal management can effectively guarantee the LED'S long-term stability. The front panel board is high translucent acrylic, which ensures the light even, soft and high transmittance. Instant start, no flickering, no humming, no hazardous material.

### Specifications

#### Dimension (mm)

R25	Ø93*12 CurOut:Ø68
R4	Ø145*12 CurOut:Ø125
R6	Ø180*12 CutOut:Ø160
R8	Ø240*12 CutOut:Ø220
R30	Ø300*12 CutOut:Ø285

#### Color Temperature

Warm White	3000K ± 200K
Natural White	4000K ± 250K
Pure White	5700K ± 350K

#### Power & Lumen Output

R25	06W	500 lm @ 4000K
R4	08W	600 lm @ 4000K
R6	15W	1200 lm @ 4000K
R8	24W	1800 lm @ 4000K
R30	25W	2200 lm @ 4000K

#### Color Rendering Index

>80

#### Rated Life (L70)

50,000 Hours

#### Housing

Aluminum

#### Beam Spread

120°

#### Operating Temperature

-20°C to +45°C (Amb.)

#### Input Voltage

200-240V/AC

#### Power Factor

>0.95

#### Net Weight

0.28±0.1Kg -0.52±0.1Kg


#### IP/ IK

IP44/ IK05

#### Installation

Clip in

## Dimension and Illumination Diagram

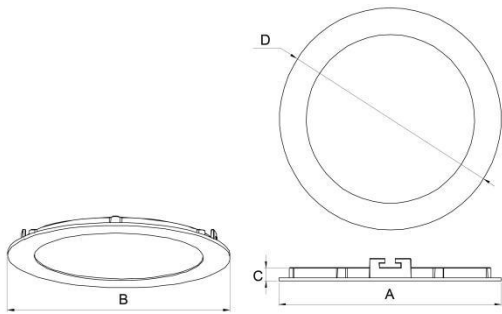

		Dimension A [mm]	Dimension B [mm]	Dimension C [mm]	Dimension D [mm]
<b>R25</b>	<b>06W</b>	93	93	12	93
<b>R4</b>	<b>08W</b>	145	145	12	145
<b>R6</b>	<b>15W</b>	180	180	12	180
<b>R8</b>	<b>24W</b>	240	240	12	240
<b>R30</b>	<b>25W</b>	300	300	12	300

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel Light	6W	WW=3000K	<b>R25</b>	White	/
		8W	NW=4000K	<b>R4</b>		
		15W	PW=5700K	<b>R6</b>		
		24W		<b>R8</b>		
		25W		<b>R30</b>		

\*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-PAN-08W-XW-R25	06W	3000K/4000K/5700K	380-500	120°	Ø93*12 CurOut:Ø68
SL-PAN-08W-XW-R4	08W	3000K/4000K/5700K	450-650	120°	Ø145*12 CurOut:Ø125
SL-PAN-15W-XW-R6	15W	3000K/4000K/5700K	1000-1300	120°	Ø180*12 CutOut:Ø160
SL-PAN-24W-XW-R8	24W	3000K/4000K/5700K	1800-2200	120°	Ø240*12 CutOut:Ø220
SL-PAN-25W-XW-R30	25W	3000K/4000K/5700K	1800-2200	120°	Ø300*12 CutOut:Ø285

## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-08W-WW-R25	1	L350*W320*H165	20	21120	42240
SL-PAN-08W-NW-R25	1	L350*W320*H165	20	21120	42240
SL-PAN-08W-PW-R25	1	L350*W320*H165	20	21120	42240
SL-PAN-08W-WW-R4	1	L350*W320*H205	20	17280	34560
SL-PAN-08W-NW-R4	1	L350*W320*H205	20	17280	34560
SL-PAN-08W-PW-R4	1	L350*W320*H205	20	17280	34560
SL-PAN-15W-WW-R6	1	L396*W350*H243	20	11520	23040
SL-PAN-15W-NW-R6	1	L396*W350*H243	20	11520	23040
SL-PAN-15W-PW-R6	1	L396*W350*H243	20	11520	23040
SL-PAN-24W-WW-R8	1	L516*W400*H308	20	5760	11520
SL-PAN-24W-NW-R8	1	L516*W400*H308	20	5760	11520
SL-PAN-24W-PW-R8	1	L516*W400*H308	20	5760	11520
SL-PAN-25W-WW-R30	1	L630*W410*H370	20	4000	8000
SL-PAN-25W-NW-R30	1	L630*W410*H370	20	4000	8000
SL-PAN-25W-PW-R30	1	L630*W410*H370	20	4000	8000

### Shanghai Sheenly Lighting Co., Ltd.

No. 1688 Lianhang Road, Bldg 22, Minhang District, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

**\*All specifications subject to change without notice.**

**©2009-2018 Sheenly Lighting all rights reserved.**