

LED Linear Highbay



- Up to 130 lm/watt
- Unique grille design, innovative heat sink
- Modularization, easy to assemble.
- Low operating temperature, makes it extremely versatile under different easy/hard operating conditions
- Adjustable beam angle 60° - 180°
- Versatile and easy installation, suspension, stem mounted, and wall mounted
- 5 Years Guarantee

Applications

- Factory
- Warehouse
- Exhibition Hall
- Parking Lot
- Stadium
- Gas Station
- Train Station



Sheenly LED Linear Highbay Light

LED Linear Highbay as a new generation of LED Highbay Light is complement and reinforce of the LED Bay Light industrial lighting.

The innovative grille design benefits air convection and heat sink. The professional adjustable combined bracket makes it easy to change the beam angle of lights and suitable for widely applications.

The whole structure well ensures IP65 waterproof and 5 years guarantee.

Specifications

Dimension

100W	645*125*56.5 mm
150W	845*125*56.5 mm
200W (Double combination)	740*375*65.5 mm
300W (Double combination)	940*375*65.5 mm

Power & Lumen Output

100W	13000 lm @ 4000K	Ra 70
150W	19500 lm @ 4000K	Ra 70
200W (Double combination)	26000 lm @ 4000K	Ra 70
300W (Double combination)	39000 lm @ 4000K	Ra 70

Color Temperature

Natural White	4000 ±250K
Daylight White	5000 ±300K

Color Rendering Index

>70 (>80)

Rated Life (L80)

50,000 Hours

Housing

Aluminum

Beam Spread

120°

Operating Temperature

-20°C to +30°C (Amb.)

Input Voltage

220-240V/AC

100-277V/AC

95-305V/AC

Power Factor

>0.95

Net Weight

6.10 - 7.35 Kg

IP

IP65

IK

IK10


Installation

Pendent

Wall Mounting

Stem Mounting

Dimension(mm)

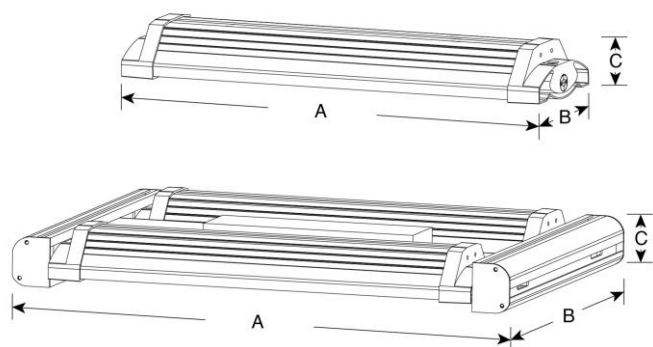

	Dimension A	Dimension B	Dimension C
100W	645 mm	125 mm	56.5 mm
150W	845 mm	125 mm	56.5 mm
200W (Double combination)	740 mm	375 mm	65.5 mm
300W (Double combination)	940 mm	375 mm	65.5 mm

Ordering Information

Sheenly	Class	Watt	CCT	Model	Options
SL=Sheenly Lighting	BAY=Bay Light	100W 150W	NW=4000 ±250K DW=5000 ±300K	EM	

*Standard finishing comes in Sliver, for other finishing color please specify when place the order.

Part Number	Power (W)	CCT	Lumen Output (lm)		Beam	Dimension (mm)
			CRI 70	CRI 80		
SL-BAY-100W-XW-EM1	100W	4000K/5000K	13000	12000	120°	645*125*56.5
SL-BAY-100W-XW-EM2	200W	4000K/5000K	26000	24000	120°	740*375*65.5
SL-BAY-150W-XW-EM1	150W	4000K/5000K	19500	18000	120°	845*125*56.5
SL-BAY-150W-XW-EM2	300W	4000K/5000K	39000	36000	120°	940*375*65.5

*XW: NW 4000K /DW 5000K

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.