

## Pendo



## LED Pendant Linkable Linear Light

Sheenly LED Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly's new Up down pendant Linear Light brings out the beauty of any space with a unifying aesthetic.

### Features

- High lighting efficiency, up to 105lm/W
- Up & down light design
- UGR<19 optional, ideal light distribution for Office Lighting
- Simple installation.
- Easy connectable.
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Seamless linkable

### Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms

### Specifications

#### Dimension ([mm])

40W	1150*75*84
50W	1450*75*84

#### Power & Lumen Output

40W	4200 lm @ 4000K
50W	5250 lm @ 4000K

#### Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

#### Color Rendering Index

>80

#### Rated Life (L70)

50,000 Hours

#### Housing

Aluminum

#### Beam Spread

90°

#### Operating Temperature

-20°C to +40°C (Amb.)

#### Input Voltage

220-240V/AC

#### Power Factor

>0.9

#### Working Voltage & Current

40W	Up: 40V±2V/DC 200mA
	Down: 37V±2V/DC 700mA
50W	Up: 40V±2V/DC 200mA
	Down: 40V±2V/DC 1050mA

#### Glow Wire

650 °C

#### IP

IP40

#### IK


IK05

#### Installation

Pendent



## Dimension

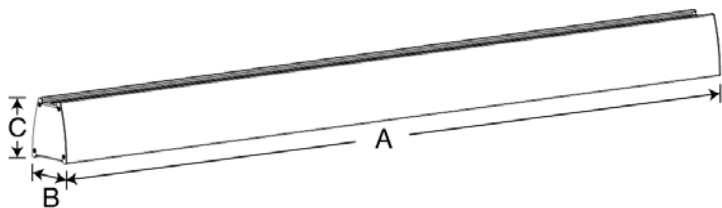


	Dimension A [mm]	Dimension B [mm]	Dimension C [mm]
40W	1150	75	84
50W	1450	75	84

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Options
SL=Sheenly Lighting	LIN=Linear Light	40W 50W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K	P4 P5	UD

Part Number	Power	CCT	Lumen Output	Beam	Dimension (mm)
SL-LIN-40W-WW-P4-UD	40W	3000K ±200K	4000	90°	1150*75*84
SL-LIN-40W-NW-P4-UD		4000K ±250K	4200	90°	
SL-LIN-40W-PW-P4-UD		5000K ±300K	4200	90°	
SL-LIN-50W-WW-P5-UD	50W	3000K ±200K	5000	90°	1450*75*84
SL-LIN-50W-NW-P5-UD		4000K ±250K	5250	90°	
SL-LIN-50W-PW-P5-UD		5000K ±300K	5250	90°	

## Application

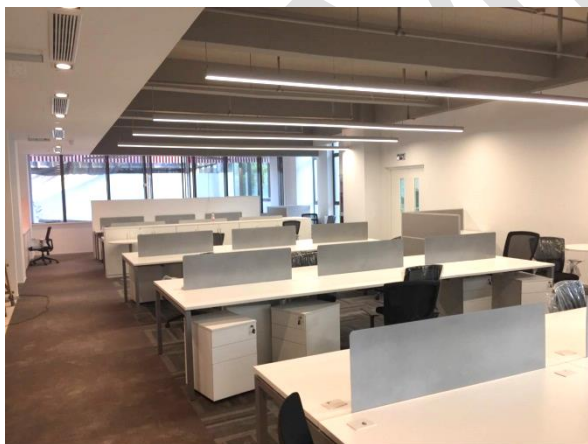

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.