

Recessed Linear Light



Features

- High lighting efficiency, up to 105lm/W
- Ultra-thin & Recessed design
- UGR<19 optional, ideal light distribution for Office Lighting
- Simple and fast recessed installation.
- Easy connectable.
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee

Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Warehouses
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms



LED Recessed Linear Light

Sheenly LED Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly's new LED Recessed Linear Light brings out the beauty of any space with a unifying aesthetic.

Specifications

Dimension ([mm])

26W	1150*57*31.5
35W	1450*57*31.5

Power & Lumen Output

26W	2800 lm @ 4000K
35W	3600 lm @ 4000K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Day White	5000 ±300K

Color Rendering Index

>80

Rated Life (L70)

50,000 Hours

Housing

Aluminum

Beam Spread

120°

Operating Temperature

-20°C to +60°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.9

Working Voltage & Current

26W 30±2 V/DC & 700mA

35W 41±2 V/DC & 700mA

Glow Wire

650 °C (850°C Optional)

IP

IP40


IK

IK05

Installation

Clip in

Dimension

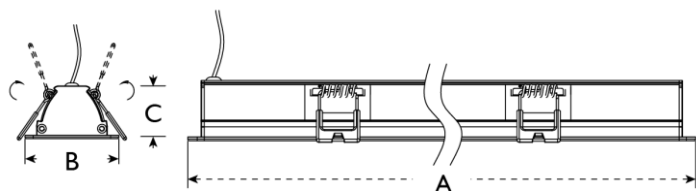

	Dimension A [mm]	Dimension B [mm]	Dimension C [mm]
26W	1150	57	35
35W	1450	57	35

Ordering Information

Sheenly	Class	Watt	CCT	Model
SL=Sheenly Lighting	XLN=Linear Light	26W 35W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K	R4 R5

Part Number	Power	CCT	Lumen Output	Beam	Dimension (mm)	Cutout
						(mm)
SL- XLN -26W- WW- R4	26W	3000K ±200K	2600	90°	1150*57*31.5	1140*46
SL- XLN -26W- NW- R4		4000K ±250K	2800	90°		
SL- XLN -26W- DW- R4		5000K ±300K	2800	90°		
SL- XLN -35W- WW- R5	35W	3000K ±200K	3400	90°	1450*57*31.5	1440*46
SL- XLN -35W- NW- R5		4000K ±250K	3600	90°		
SL- XLN -35W- DW- R5		5000K ±300K	3600	90°		



Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China
 Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.
 ©2009-2017 Sheenly Lighting all rights reserved.