

## Pendo CTA



### Sheenly LED Troffer Light Pendo CTA

Color temperature can be adjusted from 3000K to 5700K. In the meanwhile, the GROUP function ensures you to add different groups and control them separately and synchronously.

#### Features

- High lighting efficiency, up to 100lm/w.
- Powerful light output, up to 1500lm/Meter
- Built-in Driver
- UGR<19, ideal light distribution for office lighting
- Super fast installation, suspended or surface mounted
- Connectable. Fast installation, suspended or surface mounted
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 years Guarantee

#### Applications

Meets the general and decoration lighting environment such as:


- Parking lot
- Warehouse
- Tunnel
- Basement
- Industrial Lighting

#### Specifications

<b>Dimension (mm)</b>	
P4	1150*57*32
<b>Power &amp; Lumen Output</b>	
40W	4000 lm @ 4000K
<b>Color Temperature</b>	
BW	3000-6000K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L80)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Optics</b>	Opal
<b>Beam Spread</b>	10%Up90%Down
<b>Operating Temperature</b>	-20°C to +45°C (Amb.)
<b>Input Voltage</b>	100-277V/AC
<b>Power Factor</b>	>0.95
<b>Flatness</b>	<1.5mm
<b>Working Voltage &amp; Current</b>	
<b>30W</b>	Up: 35V±3V/DC750mA
<b>10W</b>	Down: 38V±3V/DC 200mA
<b>Net Weight (Includes Driver)</b>	2kg
<b>Glow Wire</b>	650 °C (850°C optional)
<b>IP</b>	IP40
<b>IK</b>	IK05
<b>Installation</b>	Pendant Mounted Surface Mounted



## Dimension [mm]

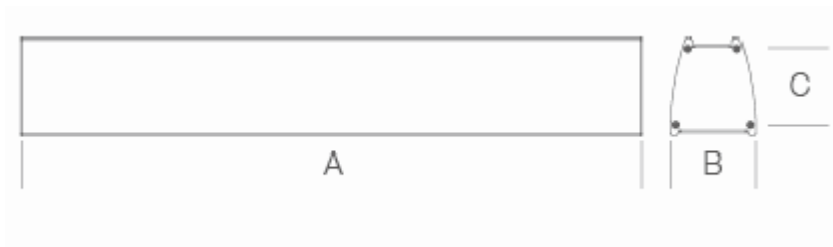

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
<b>P4</b>	[1150] 45.3"	[57]2.2"	[32]1.3"

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	LIN=Linkable	40W	BW=3000K -6000K	P4	SI=Silver	

\*Standard finishing comes in Silver, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-LIN-40W-BW-P4-UD	40W	3000K-6000K	4000	10%UP90%DOWN	1150 *57*32

### Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China  
 Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.