

Glossi



LED Transparent Pendant Light

Glossi is an unique pendant light. It is slim, transparent and delivers an exceptionally bright, uniform light both vertically and horizontally, for best-ever performance and outstanding design flexibility.


Features

- Attractive, ultra-thin, modern and unique photometric design
- High efficiency, 130lm/W
- Visually appealing light with minimal glare
- 2 different lengths to suit applications
- Seamless linkable

Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Lobbies
- Conference Rooms



Specifications

Dimension ([mm])

30W	152*1150*25
40W	152*1450*25

Power & Lumen Output

30W	3500 lm @ 4000K
40W	5200 lm @ 4000K

Color Temperature

Warm White	3000 ± 200K
Natural White	4000 ± 250K
Pure White	5700 ± 350K

Color Rendering Index

>80

Rated Life (L70)

50,000 Hours

Housing

Aluminum

Beam Spread

Transparent 360°

Operating Temperature

-20°C to +40°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.95

Working Voltage & Current

30W	36 ± 2 V/DC & 700mA
40W	36 ± 2 V/DC & 1050mA

Glow Wire

650 °C

IP

IP20


IK

IK05

Installation

Pendent Mounted

Dimension (mm)

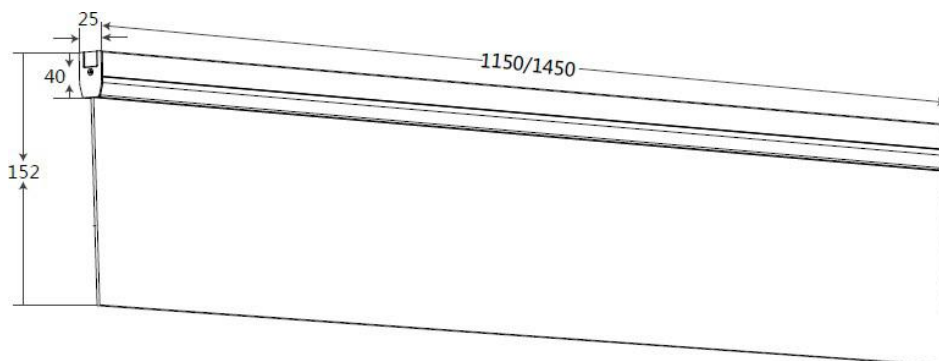

Ordering Information

Sheenly	Class	Watt	CCT	Model	Options
SL=Sheenly Lighting	PAN=Panel Light	30W 40W	WW=3000 ±200K NW=4000 ±250K PW=5000 ±350K	GS	

*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output (lm)	Beam	Dimension (mm)
SL-PAN-30W-WW-GS	30W	3000K ±200K	3200	Transparent	152*1150*25
SL-PAN-30W-NW-GS		4000K ±250K	3500	Transparent	
SL-PAN-30W-PW-GS		5700K ±350K	3500	Transparent	
SL-PAN-40W-WW-GS	40W	3000K ±200K	5000	Transparent	152*1450*25
SL-PAN-40W-NW-GS		4000K ±250K	5200	Transparent	
SL-PAN-40W-PW-GS		5700K ±350K	5200	Transparent	

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-30W-XW-GS	1	L1250*W340*H210	6	1296	2592
SL-PAN-40W-XW-GS	1	L1550*W340*H210	6	972	2268

Shanghai Sheenly Lighting Co., Ltd.

No. 1688 Lianhang Road, Bldg 22, Minhang District, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.