

LED Troffer Light Vatro CTA



Sheenly LED Troffer Light Vatro CTA

Color temperature can be adjusted from 3000K to 5700K. In the meanwhile, the GROUP function ensures you to add different groups and control them separately and synchronously.

Features

- Demand of premium high quality standards
- Efficiency up to 125lm/w, UGR<19(Optional), SDCM<=4
- CRI>80, Erp compatible
- Color temperature adjustable 3000K to 5700K
- Motion sensors are optional
- Emergency battery pack last for 3 hours
- Customized size accepted

Applications

Meets the general and decoration lighting environment such as:


- Office
- Restaurant
- Hotel & Shops
- School&Hospital
- Hallway&Lobbies
- Meeting Room

Specifications

Dimension (mm)	
EX	595 x 595 x 10
GX	622 x 622 x 10
Power & Lumen Output	
40W	5000 lm @ 4000K
Color Temperature	
BW	3000K -6000K
Color Rendering Index	>80
Rated Life (L80)	50,000 Hours
Housing	Aluminum
Optics	Opal
Beam Spread	120°
Operating Temperature	-20°C to +45°C (Amb.)
Input Voltage	220-240V/AC
Power Factor	>0.95
Flatness	<1.5mm
Working Voltage & Current	
40W	33±3V/DC &1000mA
Net Weight (Includes Driver)	3.75-4.00 kg
Glow Wire	650 °C (850°C optional)
IP	IP40(Room Side)
IK	IK05
Installation	Recessed/Box Surface Mounted/Pendant/Clip in



Dimension [mm]

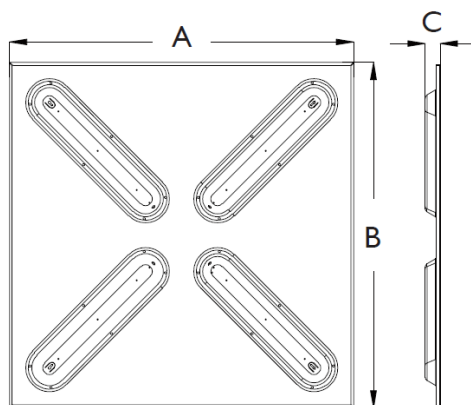

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
EX	[595]23.4"	[595]23.4"	[10]0.39"
GX	[622]24.5"	[622]24.5"	[10]0.39"

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRO=Troffer	40W	BW=3000K -6000K	EX GX	WH=White SI=Silver	

*Standard finishing comes in White, for other finishing color please specify when place the order.

	Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
595*595 LED Panel	SL-TRO-40W-BW-EX	40W	3000K-6000K	5000	120°	595 x595 x10
622*622 LED Panel	SL-TRO-40W-BW-GX	40W		5000	120°	622 x622 x10

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China
Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.